

W360 Interior Landscape / Aquascape Light

80W LED / 35°



ORDERING GUIDE

KSW360N - - - - -

Spectrum

AMZ Amazon Sun (4000 - 6500K)
TB Tuna Blue
 (10000 - 20000K)

Finish

WH White
BK Black

Mount

TG w/ G-type Track Adapter
TEX w/ E-type DMX Track Adapter
CLP w/ Clamp Mount

Power Supply & Control

PS Power Supply
PSX Power Supply w/ DMX (only with TEX mount)

Plug/Connection


US US 120V
EU EU 220V

- Plant / Coral Focused Light Spectrum
- High-Intensity Point Source LED
- Low-Profile
- DMX Controllable
- Also Available with Other Optics

SPECIFICATIONS


| | |
|-----------------------|---|
| Beam Angle | 35° |
| Spectrum Type | AMZ : Plant Flourish & Growth TB : Coral Health & Growth |
| Control | Intensity (0% - 100%), CCT |
| LED Source | DiCon Dense Matrix LED |
| Power Draw | 80W Max |
| AC Input Voltage | 100 - 240V AC, 60Hz |
| Cooling | Fan Cooled |
| Operating Temperature | 32 - 104°F (0 - 40°C) |
| Fixture Weight | 1.3lb (~0.6kg) |
| Power Supply Weight | 1.2lb (~0.5kg) |

MECHANICAL FIGURES

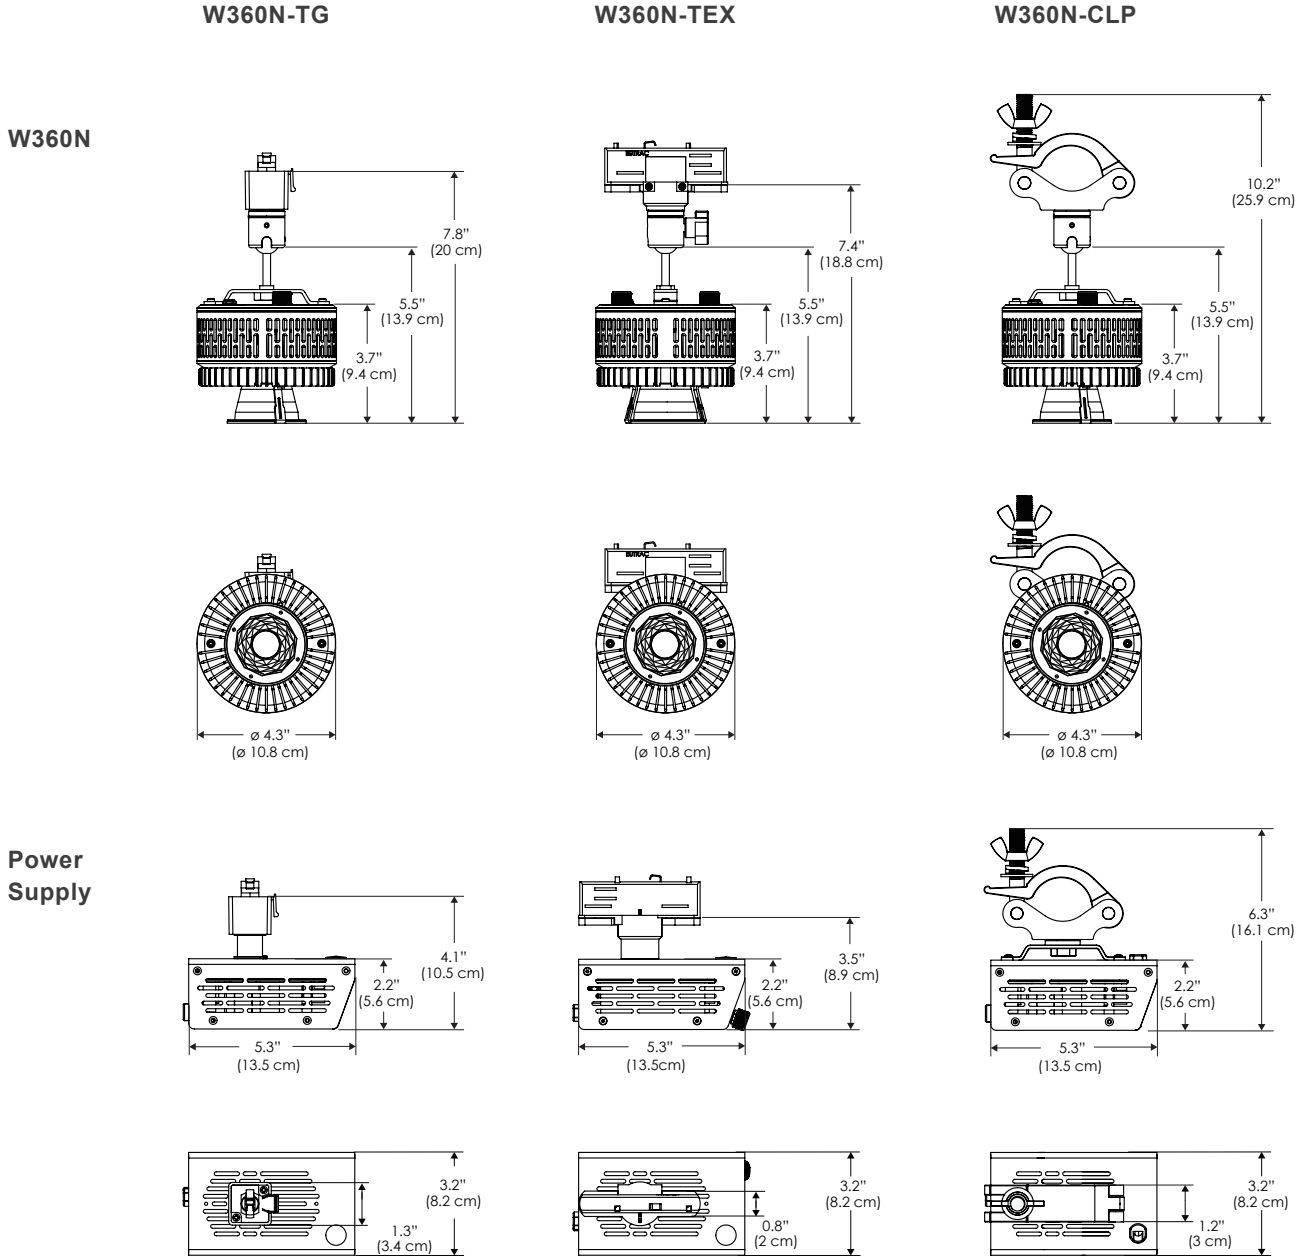


PHOTOMETRIC DATA

AMZ




| Distance | | 5' [~1.5 m] | 8' [~3.7 m] | 12' [~3.7 m] |
|---------------|-----|-------------------|-------------------|-------------------|
| @4000K | fc | 439 | 134 | 62 |
| | lux | 4728 | 1438 | 672 |
| @6500K | fc | 445 | 135 | 63 |
| | lux | 4786 | 1456 | 680 |
| Beam Diameter | | Ø 3.8' [1.2 m] | Ø 6.1' [1.9 m] | Ø 9.1' [2.8 m] |

Beam Angle : 35°

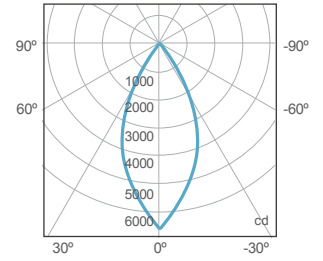

TB



| Distance | | 5' [~1.5 m] | 8' [~2.4 m] | 12' [~3.7 m] |
|---------------|-----|-------------------|-------------------|-------------------|
| @10000K | fc | 89 | 39 | 19 |
| | lux | 953 | 418 | 199 |
| @20000K | fc | 156 | 69 | 33 |
| | lux | 1675 | 738 | 353 |
| Beam Diameter | | Ø 1.5' [0.5 m] | Ø 2.5' [0.7 m] | Ø 3.7' [1.1 m] |

Beam Angle : 35°

