

# W360 Interior Landscape / Aquascape Light

## 80W LED / 55°



- Plant / Coral Focused Light Spectrum
- High-Intensity Point Source LED
- Low-Profile
- DMX Controllable
- Also Available with Other Optics

### ORDERING GUIDE

**KSW360BD** -  -  -  -  -

#### Spectrum

**AMZ** Amazon Sun (4000 - 6500K)  
**TB** Tuna Blue (10000 - 20000K)

#### Finish

**WH** White  
**BK** Black

#### Mount

**TOX** w/ O-type DMX Track Adapter  
**TON** w/ O-type Non-DMX Track Adapter  
**CLP** w/ Clamp Mount  
**MPT** w/ Monopoint Adapter Mount (PSX+120V only)  
**TG** w/ G-type Track Adapter  
**TEX** w/ E-type DMX Track Adapter Legacy product

#### Power Supply & Control

**PS** Power Supply  
 US  EU  
**PSX** Power Supply w/ DMX (compatible with TOX/MPT mount)  
 US  EU

#### Plug/Connection


**US** US 120V  
**EU** EU 220V

### SPECIFICATIONS


Beam Angle	55°
Spectrum Type	AMZ : Plant Flourish & Growth TB : Coral Health & Growth
Control	Intensity (0% - 100%), CCT
LED Source	DiCon Dense Matrix LED
AC Power Draw	80W max
AC Input Voltage	100 - 240V AC, 60Hz
Cooling	Fan Cooled
Operating Temperature	32 - 104°F (0 - 40°C)
Fixture Weight	1.3lb (0.6kg)
Power Supply Weight	1.0lb (0.4kg)

## MECHANICAL FIGURES


### W360BD-TOX/TON

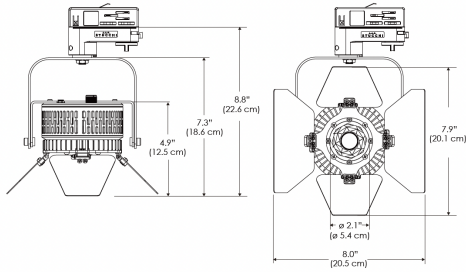


### PS US

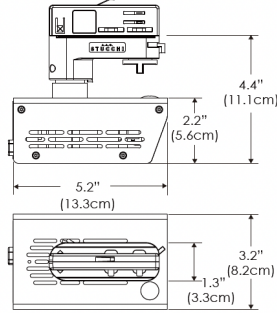


### PSX US




### W360BD-TOX/TON

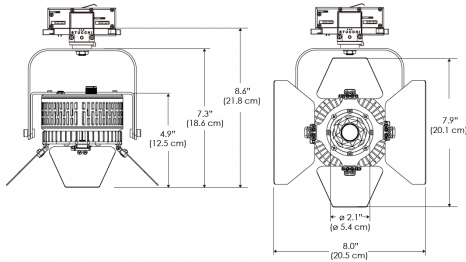


### PS EU




### PSX EU

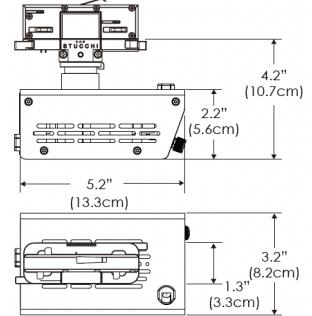


### W360BD-CLP

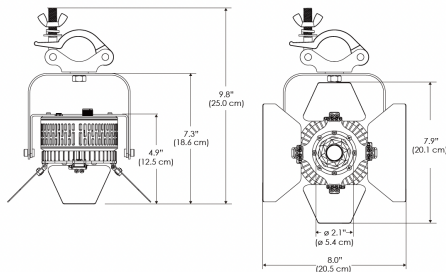

### PS US EU

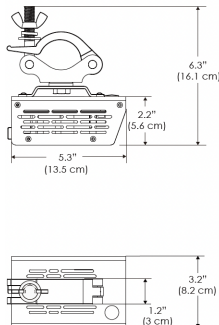


### Mounting Bracket Dimensions ALL-CLP

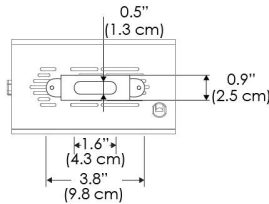


\*All -CLP configuration models come with standard DC cables of 6" and AC cables of 10'.


### W360BD-MPT

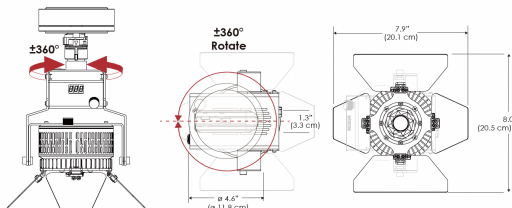

### PSX US

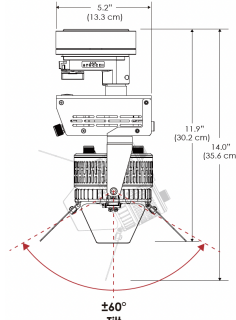


### PSX EU

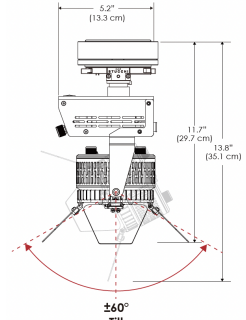


## MECHANICAL FIGURES


**W360BD-TEX** Legacy product

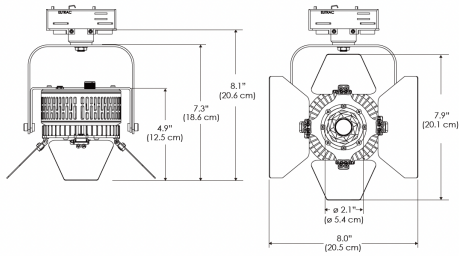



PS US EU

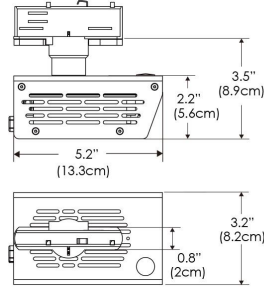

PSX US EU

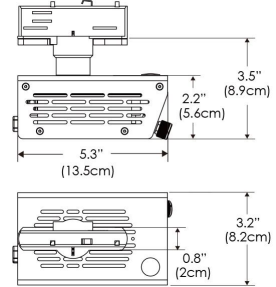

**W360BD-TG** Legacy product

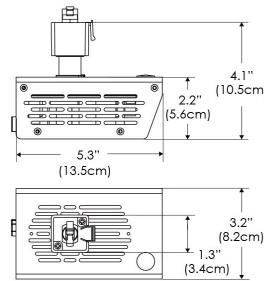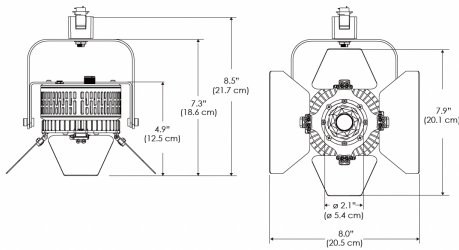


## PHOTOMETRIC DATA

**AMZ**

Distance		3' (~0.9 m)	5' (~1.5 m)	10' (~3.0 m)
@4000K	fc	465	237	47
	lux	4998	2548	500
@6500K	fc	470	240	48
	lux	5059	2579	506
Beam Diameter		Ø 2.3' (0.7m)	Ø 3.8' (1.2m)	Ø 7.6' (2.3m)



Beam Angle : 55°

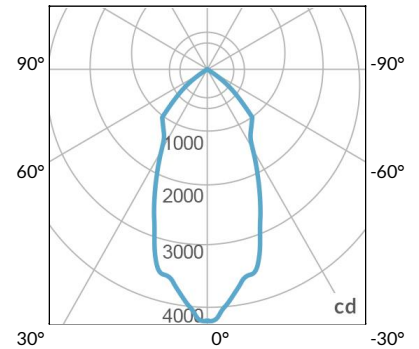


**TB**

Distance		3' (~0.9 m)	5' (~1.5 m)	10' (~3.0 m)
@10000K	fc	276	100	27
	lux	2965	1067	286
@20000K	fc	145	53	15
	lux	1560	562	154
Beam Diameter		Ø 2.3' (0.7m)	Ø 3.8' (1.2m)	Ø 7.6' (2.3m)



Beam Angle : 55°

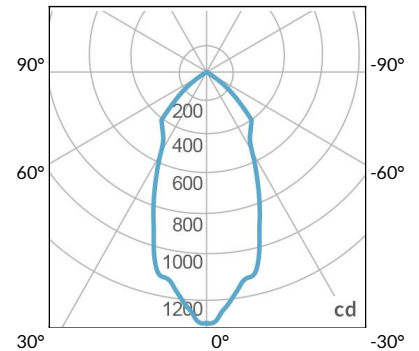

**DMX FOOTPRINT**

Amazon Sun		
Channel	1	Intensity
	2	CCT (4000-6500k)

Tuna Blue		
Channel	1	Intensity
	2	CCT (10000-20000k)
	3	Violet
	4	Red
	5	Green