

# W360 Animal Health UVA / UVB Light

## 30W LED / 35°



- Broadband UVA for Animal Health
- UVB for Reptile Vitamin D3 Synthesis
- Adjustable Intensity
- DMX Controllable
- Also Available with Other Optics

### ORDERING GUIDE

**KSW360N** - **UVBA** -  -  -  -

#### Spectrum

UVBA UVBA

#### Finish

WH White  
BK Black

#### Mount

TOX w/ O-type DMX Track Adapter  
TON w/ O-type Non-DMX Track Adapter  
CLP w/ Clamp Mount  
MPT w/ Monopoint Adapter Mount (PSX+120V only)

#### Power Supply & Control

PS Power Supply



PSX Power Supply w/ DMX  
(compatible with TOX/MPT mount)



#### Plug/Connection


US US 120V  
EU EU 220V

### SPECIFICATIONS


Beam Angle	35°
Spectrum Type	UVBA
Control	Intensity (0% - 100%)
LED Source	DiCon Dense Matrix LED
AC Power Draw	30W max
AC Input Voltage	100 - 240V AC, 60Hz
Cooling	Fan Cooled
Operating Temperature	32 - 104°F (0 - 40°C)
Fixture Weight	1.1lb (0.5kg)
Power Supply Weight	1.0lb (0.4kg)

MECHANICAL FIGURES


W360N-TOX/TON

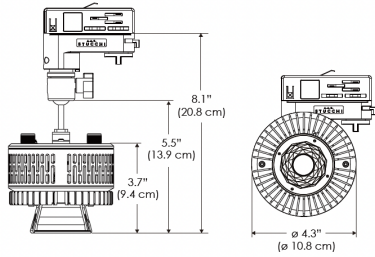


PS US

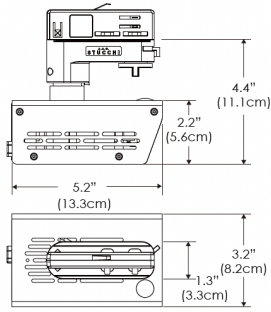


PSX US

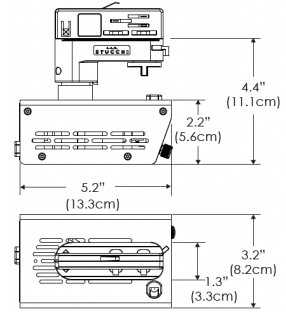


W360N-TOX/TON

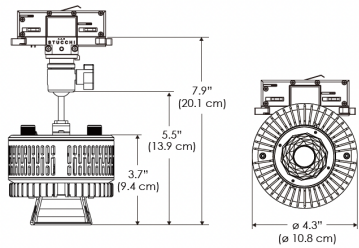


PS EU

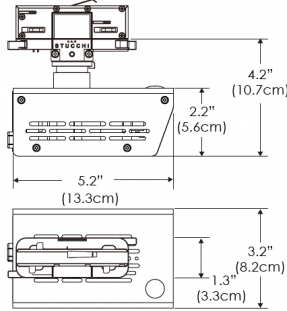


PSX EU

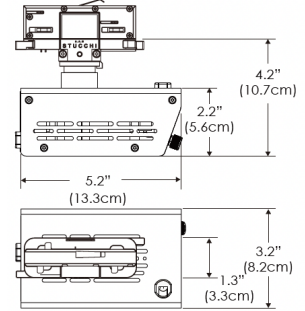


W360N-CLP

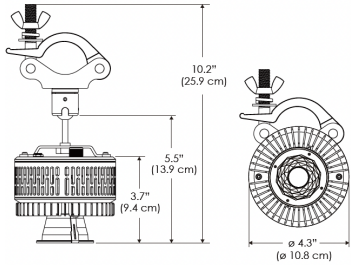

PS US EU

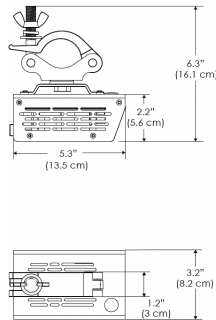


Mounting Bracket Dimensions ALL-CLP

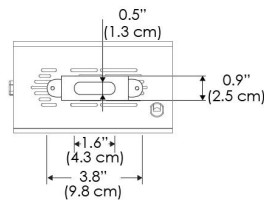


\*All -CLP configuration models come with standard DC cables of 6" and AC cables of 10'.


W360N-MPT

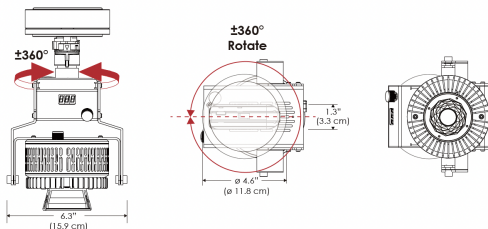


PSX US

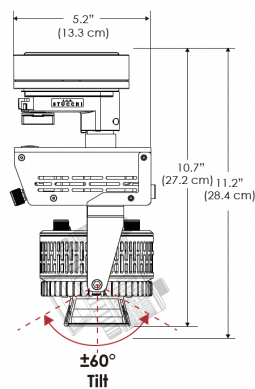

PSX EU

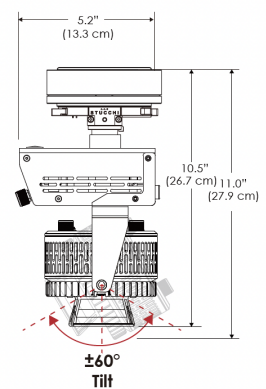

## PHOTOMETRIC DATA

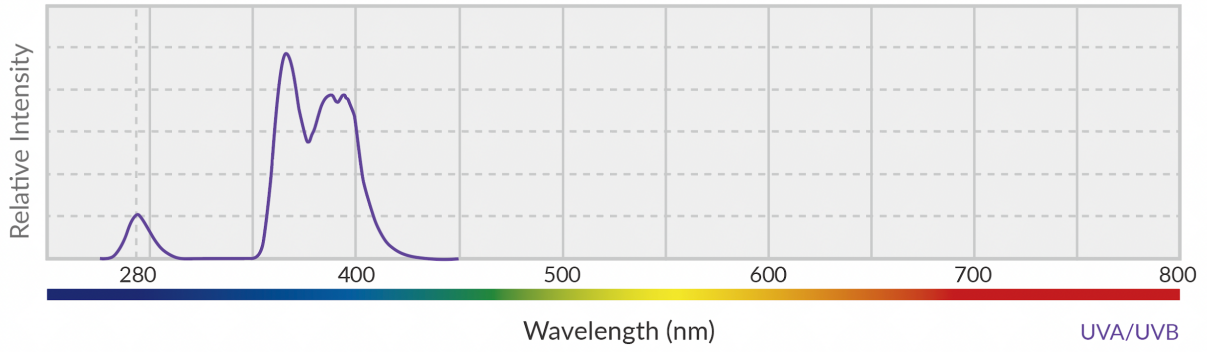

Distance		1' (~0.3 m)	3' (~0.9 m)	5' (~1.5 m)
Total UV	μw/cm <sup>2</sup>	9870	882	300
UVA		9107	813	279
UVB		763	69	20
Beam Diameter		Ø 1.1' (0.3m)	Ø 3.1' (0.9m)	Ø 4.9' (1.5m)